



Notice

Since the production of this document, Solar Gard has been purchased by Saint-Gobain Performance Plastics Corporation. Solar Gard is now a subsidiary of Saint-Gobain. All references within this document to Bekaert, Bekaert Specialty Films or Bekaert Specialty Films LLC, including but not limited to legal notes, copy and or copyrights are null and void. All rights and responsibilities expressed or written within this document have been transferred from Bekaert Specialty Films, LLC to Saint-Gobain.

Saint-Gobain Performance Plastics
Unit 13, Ball Mill Top Business Park
Grimley, Worcestershire WR2 6LS
United Kingdom
Tel: +44 (0) 1905 640 400
E-mail: solargardukinfo@saint-gobain.com
www.solargard.co.uk

A better environment inside and out.™

Solar Gard® Solar Window Films

LX 70

Performance results


	4mm single	4mm double
Solar energy		
% Transmittance	36	32
% Absorptance	30	39
% Reflectance	34	29
Visible light		
% Transmittance	72	65
% Reflectance exterior	9	16
% Reflectance interior	9	13
Emissivity	.77	.77
Winter U-Factor (W/m ² °C)	5.66	2.66
Shading coefficient	.52	.57
Solar heat gain coefficient	.45	.49
Solar selectivity index - luminous efficacy (VLT/SC)	1.38	1.14
Light to solar heat gain factor (VLT/SHGC)	1.61	1.33
% Ultraviolet light blocked (@ 300 to 380 nm)	>99	>99
% Total solar energy rejected	55	51
% Summer solar heat gain reduction	47	34
% Glare reduction	20	20

Physical properties nominal

Gauge	75 microns
Tensile strength	2,100 kg/cm ²
Melting point	260–265°C

Film performance

Performance results were generated from testing 4mm thick clear glass.

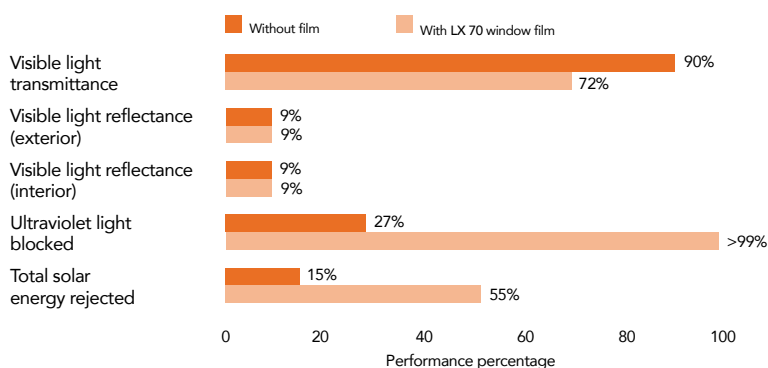

All performance results are based on the film installed on the inside surface of 4mm and 4mm+4mm thick, clear glass

Notes

1. Bekaert Specialty Films, LLC is a participating member of AIMCAL (the Association of Industrial Metallizers, Coaters and Laminators), IWFA, and EWFA. Performance results are calculated using NFRC methodology and LBNL Window 5.2 software, and are subject to variations within industry standards and only intended for estimating purposes.
2. These test data contain only results arrived at after employing specific test procedures and standards. The included data do not constitute a recommendation for, endorsement of, or certification of the product or material tested. These data are provided for informational purposes only and are not to be considered part of the basic representation or warranty, expressed or implied, including the implied warranties of merchantability or fitness for a particular purpose, that its products will conform to these test data. Bekaert's limited warranty should be carefully reviewed prior to purchasing any Bekaert product. Extrapolation of data from the sample or samples relation to the batch or lot from which data were obtained may not correlate and should be interpreted accordingly with caution. Bekaert shall not be responsible for variations in quality, composition, appearance, performance, or other feature of similar subject matter produced by persons or under conditions over which Bekaert has no control.
3. Performance results for summer solar heat gain reduction and glare reduction are calculated by comparing filmed glass to that of untreated glazing.

www.solargard.com

